Product and Cut-out Dimensions
G600 Series Dishwashers
Fully Integrated Models

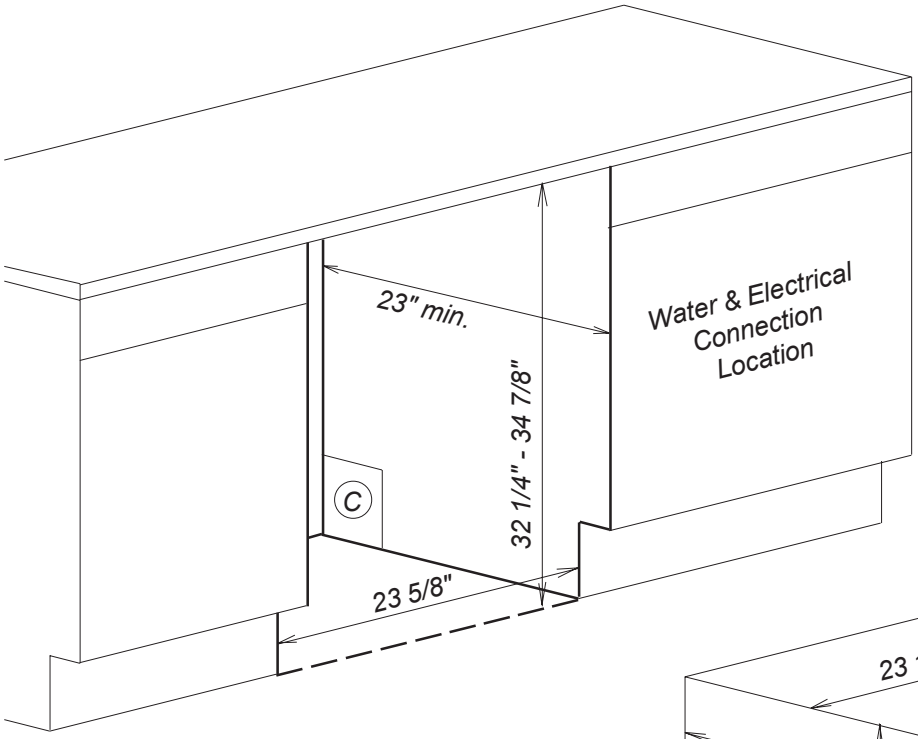

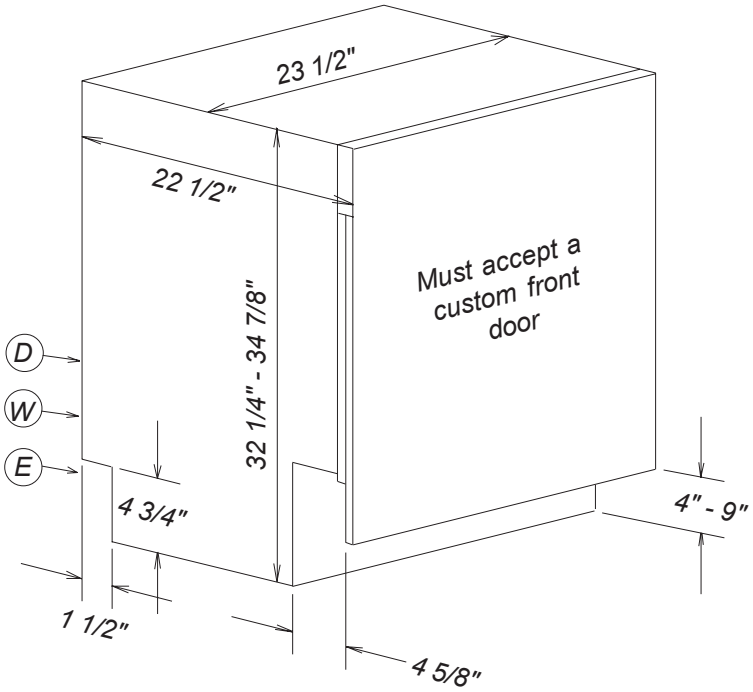

Location Codes
C - Cutout (2 1/4" x 4") for Water, Drain and Electric pass-through. Adjust according to water and drain location. *D - 5 foot flexible drain hose connects lower center rear.* *E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear.* *W - 5 foot "Double Waterproof" flexible water intake hose connects lower center rear.*
Notes
• *All Installations must be done in accordance with local codes* • *Additional 2" in height may be attained by ordering extension feet (#2702600).* • *Always use skis (included) during installation to insure proper levelling.*

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010802

Panel Information
Fully Integrated Models

Custom Panel Installations

Miele Fully Integrated dishwashers do not come equipped with any front panel. These dishwashers are designed to accept a full height panel supplied by the custom cabinet maker.

Panel size is determined in the following manner:

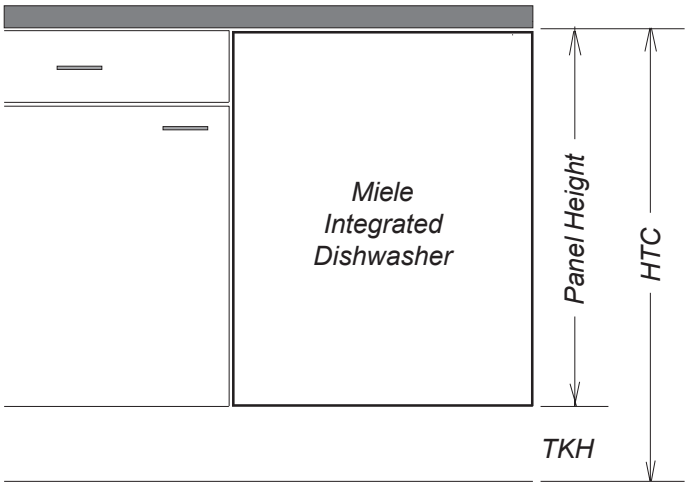

Width: *23 3/8" in all cases*

Thickness: *3/4" in all cases*

Height: *Determined using the following calculation:*

Panel Height = HTC - TKH

HTC *= Height to the underside of countertop*
TKH *= Toe Kick Height*

Note 1: *Control Panel is along top edge of unit. It is not visible when the unit is closed.*
*A handle **MUST** be located on the front panel in order to open the unit.*

***Maximum Panel Weight**:* *16 Pounds*

GFVI Panel Installations

***All Miele dishwashers do not come equipped with a front panel**. Miele offers pre-fabricated stainless steel panels for all fully integrated units. These panels are designed for 6" toekicks and are delivered with or without handles.*

GFVI 602/72 Panel w/ Handle

Designed for 6" (15 cm) toeckick
Article #: 21 9960 71

GFVI 603/72 Panel w/o Handle

Designed for 6" (15 cm) toeckick
Article #: 21 9960 72

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010802

Technical Information: Dishwashers

G600 series

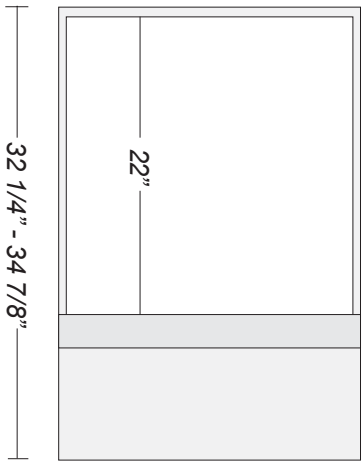

Interior cabinet height

Height to underside of countertop

Toekick	32 1/2	33	33 1/2	34	34 1/2	35	35 1/2	36
2 1/2								
3								
3 1/2								
4								
4 1/2								
5								
5 1/2								
6								
6 1/2								
7								
7 1/2								
8								
8 1/2								
9								

For Integrated installations

Acceptable combinations
Typical American installation

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010802

Connection Information
All Dishwasher Types

Water Connection

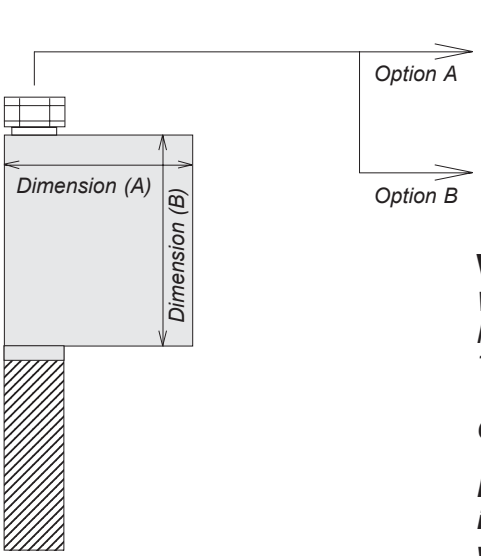

Connect via 3/4" hose bib

Connect via 3/4" adapter with 3/8" compression fitting

Waterproof System Box Dimensions

Width (A): *3 1/4"*
Height (B): *3 1/2"*
Thickness: *1 3/4"*

Cutout: *2 1/4" x 4"*

NOTE: Waterproof system box should ONLY be installed in a vertical manner to prevent build-up of water within box and possible leakage.

Waterproof System

Temperature: 110° - 130° F
Pressure: 4.5 - 145 PSI
Drain hose: 7/8" ID - 5 feet long

Electrical Connection



Voltage: 110 / 120 Volts
Fuse: 15 Amperes

5 foot cable with molded plug provided.

Terminal A: Live 1 (Black)
Terminal B: Neutral (White)
Terminal C: Ground (Green)

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010802